


# UI06H05005 BATTERY

## Technical Datasheet - Tentative

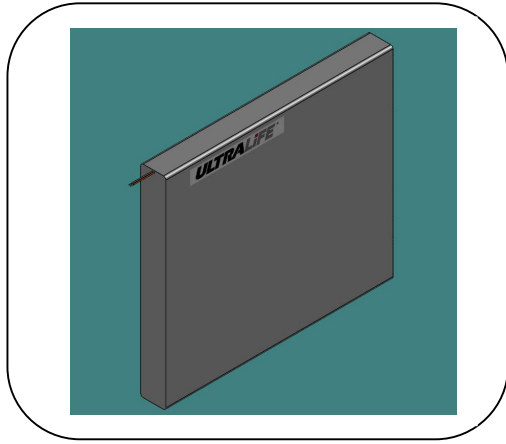

### Features

- High energy density.
- Built-in Protection Module
- Comprehensive charging/ discharging and passive safety systems.

### Application

- Suitable for use in Lighting System and Back-Up Systems

### Technical Specifications

Part No.	UI06H05005
Chemistry	Lithium Iron Phosphate (LiFePO4)

#### Electrical Parameters

Nominal voltage	19.2 V
Nominal capacity	15 Ah
Max. charge current	12 A
Max. charge voltage	21.9 V
Cont. discharge	12 A
Peak discharge	12 A
Life expectancy @ 25°C 0.2C Charge/0.2C Discharge	>2000 cycles with min 80% of initial capacity
Energy	288 Wh

#### Safety Parameters PCM

Over-charge detection voltage	3650mV/cell ± 0.025 Volts
Over-discharge detection voltage	2500mV/cell ± 0.063 Volts

Operating temperature	0°C to 45°C (charge) -20°C to 60°C (discharge)
Storage temperature	-20°C to 60°C max -20°C to 20°C recommended

#### Physical Parameters

Length	270mm
Width	240mm
Height	30mm
Weight	2650 grms
Contacts Output	Flying Leads 2.5 Sq mm 600mm
Enclosure	PVC Shrink Wrap

UI06H05005

Ultralife Batteries India Private Limited


No. 38B1 Part, Doddanakundi Industrial Area, 1st Phase, Mahadevapura, Bangalore 560 048

Phone : +91 80 28524680 , +91 80 28524690

05 October 18 UI06H05005 Rev:0

Page 1 of 2

# Dimensional Drawing

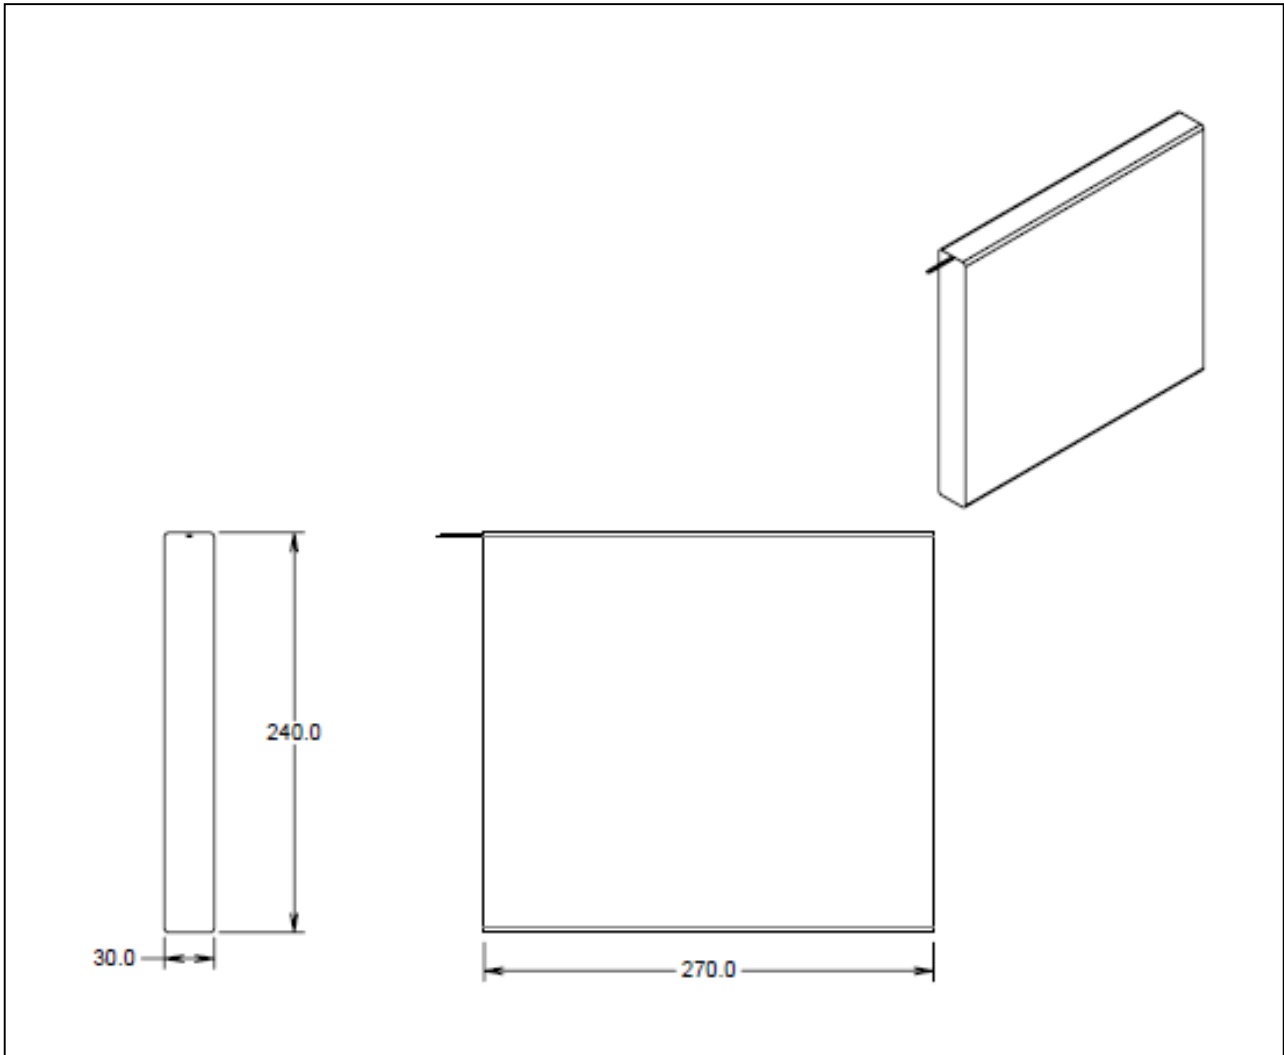

UI06H05005

Ultralife Batteries India Private Limited

No. 38B1 Part, Doddanakundi Industrial Area, 1st Phase, Mahadevapura, Bangalore 560 048

Phone : +91 80 28524680 , +91 80 28524690

05 October 18 UI06H05005 Rev:0

Page 2 of 2