


UI08H06004 BATTERY

Technical Datasheet - Tentative

Technical Specifications

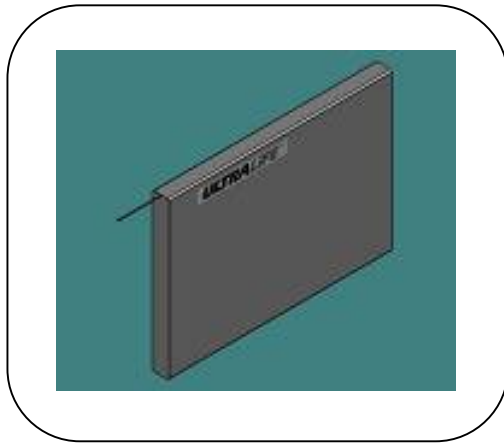

Part No.	UI08H06004
Chemistry	Lithium Iron Phosphate (LiFePO4)

Electrical Parameters

Nominal voltage	25.6V
Nominal capacity	18 Ah
Max. charge current	20 A Max
Max. charge voltage	29.2V
Cont. discharge	20 A Max
Life expectancy @ 25°C 0.2C Charge/0.2C Discharge	>2000 cycles with min 80% of initial capacity
Energy	460.8 Wh

Features

- High energy density.
- Built-in Protection Module
- Comprehensive charging/ discharging and passive safety systems.

Application

- Suitable for use with Solar Street light application and Robotics

Safety Parameters PCM

Over-charge detection voltage	3650mV/cell ± 0.025 Volts
Over-discharge detection voltage	2500mV/cell ± 0.063 Volts
Operating temperature	0°C to 45°C (charge) -20°C to 60°C (discharge)
Storage temperature	-20°C to 60°C max -20°C to 20°C recommended

Physical Parameters

Length	400mm
Width	280mm
Height	30mm
Weight	4.2 Kgs
Contacts Output	Flying Leads
Enclosure	PVC Shrink Wrap

UI08H06004

Ultralife Batteries India Private Limited


No. 38B1 Part, Doddanakundi Industrial Area, 1st Phase, Mahadevapura, Bangalore 560 048

Phone : +91 80 28524680 , +91 80 28524690

02 July 19 UI08H06004 Rev:0

Page 1 of 2

Drawing

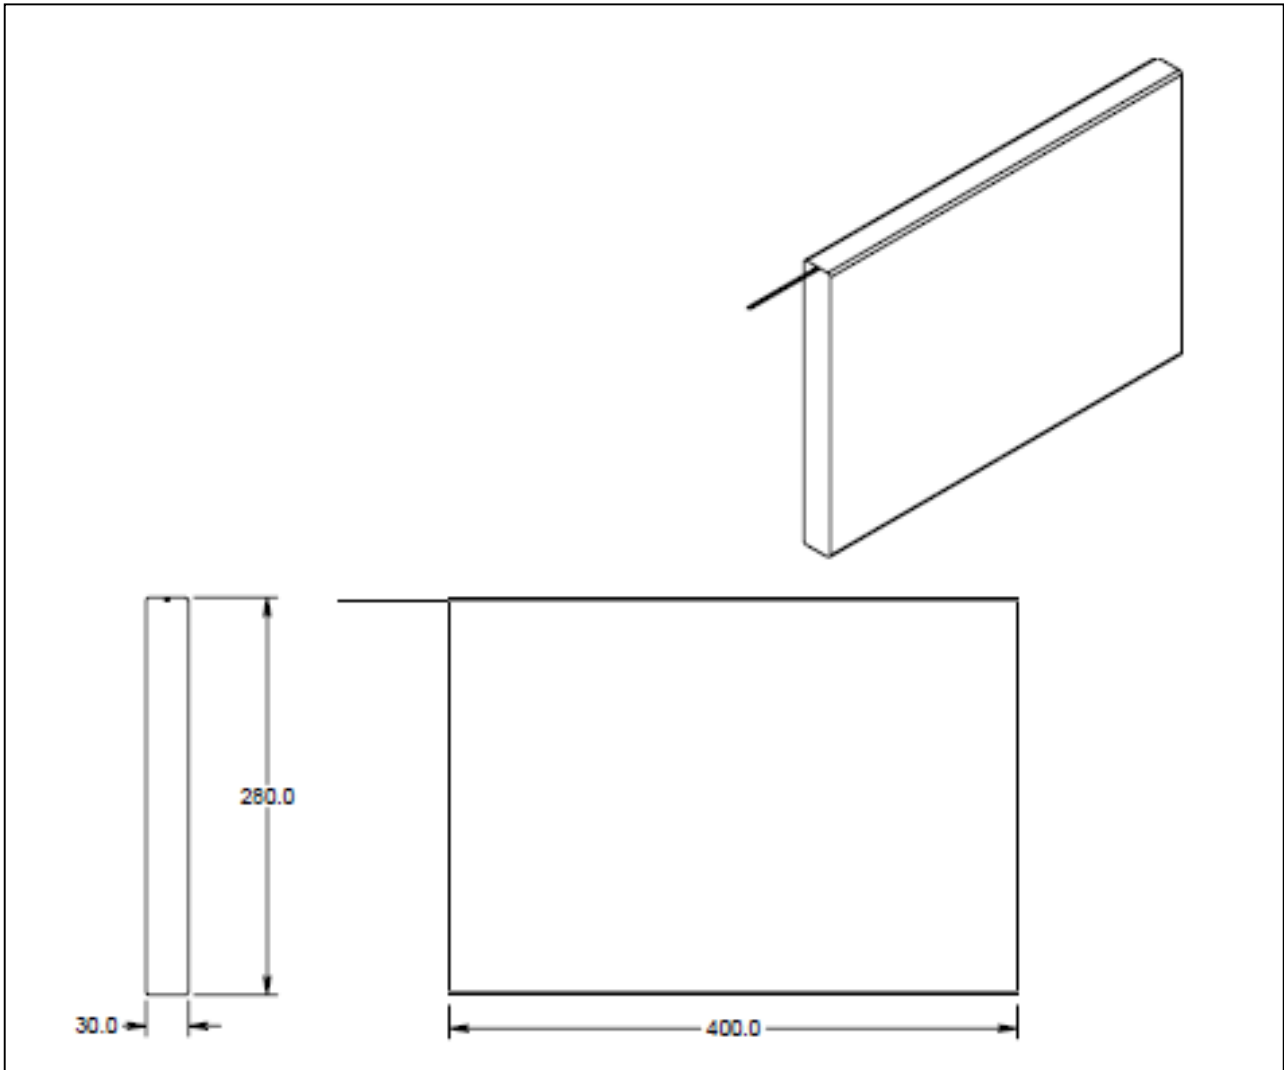

UI08H06004

Ultralife Batteries India Private Limited

No. 38B1 Part, Doddanakundi Industrial Area, 1st Phase, Mahadevapura, Bangalore 560 048

Phone : +91 80 28524680 , +91 80 28524690

02 July 19 UI08H06004 Rev:0

Page 2 of 2